

# WMT TABLE BLAST MACHINES

## Benefits:

- Cost Effective
- Minimum Maintenance
- Reduced Floor Space Requirements
- Superior Cleaning Efficiency
- No Expensive Foundations Required
- Integrated Dust Collector
- Chemical-Free Process



sinto

# SST

SURFACE TREATMENT

A Division of Roberts Sinto Corporation

3001 West Main St • PO Box 40760

Lansing, MI 48901-7960

Toll Free: 800-748-0384 • Tel: 517-371-2460

[www.RobertsSinto.com](http://www.RobertsSinto.com)


## Exceptionally Clean, and Fast.

Parts that have high vertical edges or deep pockets are best processed in the WMT Table machines. Parts are blasted while the chamber table turns. This quick and meticulous cleaning process meets a wide range of production requirements for many surface preparation and conditioning applications.

All WMT machines are equipped with an integrated dust collection system and our high performance, one-piece cast airless centrifugal blast wheel designed to propel abrasive media in a controlled pattern and direction. Unlike

other methods of surface cleaning and preparation, the chemical-free process of shot blasting does not add environmental pollutants.

These machines are designed for simple, inexpensive installation, requiring a minimum of floor space and no costly pits or duct work. And because each unit is pre-wired for quick and easy connection to a power supply, startup costs and times are reduced to a minimum.

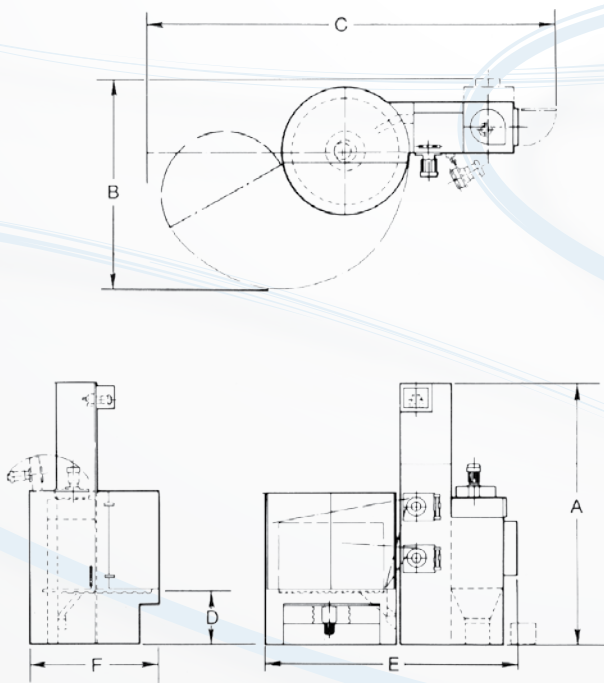

Machine Description	60"	72"	84"
Height (A)	12' 4"	12' 10"	12' 10"
Length (B)	13' 6"	14' 1"	13' 3"
Width door open (C)	19' 8"	22' 0"	22' 8"
Load Height (D)	2' 9"	3' 0"	3' 7"
Width (E)	12' 0"	13' 6"	14' 3"
Length (F)	7' 6"	8' 2"	10' 7"
Table Diameter	60"	72"	84"
Max. Part Height	39"	38"	40"
Max. Part Dimension	57"	72"	80"
Max. Part Weight (lbs.)	4,500	6,000	6,000
Loading Door	Security Door	Security Door	Security Door
Number of Wheels	1 or 2	2	2
Wheel Driving Motor (hp)	10	10	10
Table Driving Motor (hp)	½	1	½
Elevator Driving Motor (hp)	1 ½	2	1 ½
Dust Collector Fan Motor (hp)	5	5	5
Integral Dust Collector (cfm)	1500	1500	1500
Approx. Gross Weight (lbs)	9,800	13,000	11,300
Abrasive Charge (lbs)	2,000	2,500	3,000



# SST

**SURFACE TREATMENT**

A Division of Roberts Sinto Corporation

3001 West Main St • PO Box 40760

Lansing, MI 48901-7960

Toll Free: 800-748-0384 • Tel: 517-371-2460

www.RobertsSinto.com